

Policy-based reserves for power systems

Joseph Warrington, Paul Goulart, Sébastien Mariéthoz, Manfred Morari[†]

December 11, 2012

Abstract

This paper presents a new approach to accommodating large, fluctuating renewable infeeds in power systems, based on the concept of reserve policies. The approach can be viewed as a generalization of existing reserve modes, and uses robust optimization with recourse to determine operating rules for power system entities such as generators and storage units. These rules, or policies, set in advance how these entities are to respond to errors in the prediction of loads and renewable infeeds once their values are discovered. We show how *affine* policies can be chosen such that the power network constraints, namely matching supply and demand, respecting transmission line ratings, and the operating limits of power system entities, are satisfied for all possible realizations of the prediction errors. The errors may arise from any number of spatially- and/or temporally-correlated sources. Affine policies are compared with existing reserve operation modes under standard modelling assumptions, and operating cost reductions are reported for a multi-day benchmark study featuring a poorly-predicted wind infeed. Efficient prices for such “policy-based reserves” are derived, and we propose new reserve products that could be traded on electricity markets.

1 Introduction

A key challenge in incorporating highly variable intermittent renewable energy sources into power systems is the need to maintain system integrity while making best use of the energy they provide, which comes at zero marginal cost. It is widely agreed that in the next few decades, as the share of wind power becomes very large, current techniques for accommodating wind variability will become sufficiently expensive that alternatives will be sought [1, 2].

Running power systems with very high wind penetration and without excessive frequency control costs, or resorting to curtailment of renewable output, requires intelligent use of the

^{*}This work was supported by the European Commission Research Project FP7-ICT-249096 *Price-based Control of Electrical Systems (E-PRICE)*.

[†]The authors are with the Automatic Control Laboratory, Swiss Federal Institute of Technology (ETH) Zurich, Physikstrasse 3, 8092 Zurich, Switzerland. Contact: warrington@control.ee.ethz.ch

best available forecasts, at all times. In particular, any successful method for dealing with the high variability of renewables on intraday timescales (the only timescales over which prediction errors are reasonably small [3]) will require the following:

1. A forecast of future intermittent energy injections available at the time when control decisions are made.
2. Rules for acting on errors in this forecast when they are discovered.
3. Forecast error probability distributions and their correlations in both time and space over the grid.

Theoretical attention to these points has grown in the last few years as the share of wind power in several countries has grown [4–8]. The incorporation of uncertain wind inputs has typically been tackled using a scenario-based stochastic approach. For example, in Morales et al. [6] a unit commitment integer programming problem was solved first, and then in a second stage reserve margins were selected based on the requirement that the actual reserve deployment be feasible for all the scenarios considered. These ideas have since been developed to provide probabilistic guarantees on transmission constraint satisfaction using a limited number of scenarios [8].

In this paper, we also consider how reserves could be operated more efficiently on a daily timescale around any unit commitment decisions that have already been made. In contrast with existing literature, we use a robustness formulation of the problem and show that the use of affine policies can reduce expected operating costs in the presence of extreme energy fluctuations. A policy is in this case a rule, agreed in advance, governing how individual power system entities will respond to prediction errors affecting power system operation. It therefore constitutes a reserve mechanism, a concept that represents the main contribution of this work.

This work was inspired by results on disturbance feedback policies from the control literature. However these are predated by the concept of linear decision rules (LDRs) from operations research, where current states, possibly together with past data or future predictions, are combined linearly in order to make an operational decision. Early examples appeared in the 1950s, when Holt et al. used quadratic programming to schedule workforces in factories under uncertain future workloads [9]. Further applications included macroeconomic planning [10], management [11], and inventory control [12]. Typically, though, LDRs were unable to deal rigorously with operating constraints, and were not studied in much detail after the 1970s [13]. In the last decade, however, advances in constrained robust optimization have led to a revival of LDRs, for solving optimization problems where the minimizer is allowed to be a function of the data uncertainty [13–15]. This has led to some new applications, for example linear decision rules in portfolio optimization [16].

These solution methods were also shown to be applicable to robust predictive control [17–19], where control policies with various dependences on the disturbance have been studied as a means of respecting state and input constraints under uncertain system dynamics. These control policies have since been applied in areas such as building control [20].

Although optimal short-term operation of power systems, including reserves, has been studied in various ways for decades as a variant of the standard optimal power flow problem [21], recent advances in optimization over affine policies have not been exploited for real-time decision making in electricity provision under uncertainty. This application is interesting because policies may be an attractive way of using up-to-date forecasts in power systems. To this end, we present systematic ways of using future wind prediction error measurements to reduce the expected cost of reserve provision. This is made easier by the approximately linear transmission constraints present in power systems, namely matching consumption with production, and respecting line congestion limits.

In Section 2 we show how generic state space models can be used to represent a wide range of power system entities. The electrical grid modelling assumptions are also given. In Section 3 the concept of policy-based reserves is described with reference to power system control. A finite-horizon optimization problem is defined and subsequently reformulated to facilitate a numerical solution, and an analysis of some properties of affine policies for power systems is given in Section 4. In Section 5, we discuss optimal pricing and the practical implementation of policies. In Section 6 the potential benefits of policy-based reserves are reported in a numerical case study, and Section 7 concludes. Preliminary versions of some results appearing in this paper have previously been reported in [22].

Notation: The use of $(\cdot)'$ denotes a vector or matrix transpose, $[\cdot]_k$ denotes element k of a vector, $\langle X, Y \rangle$ denotes the trace of product $X'Y$, and $\otimes$ denotes the Kronecker product. I_T denotes an identity matrix of size T .

2 Power system model

This paper considers the problem of optimal operation of an electrical network to satisfy loads in the presence of uncertainty. The uncertainty to be accommodated manifests itself in the form of random power infeed from renewables and fluctuating load requirements. We will choose operating rules that apply only for a finite time into the future, on the assumption that new rules will be determined before the present ones expire. This finite time, or planning horizon, is divided into T discrete time steps, corresponding to the Programme Time Units (PTUs), of length 5 minutes to 1 hour, over which electricity is traded on modern intra-day markets [23]. The length of time horizon considered relevant to this work is up to 24 hours, after which predictions of renewable infeed are assumed to become too poor to incorporate

into sophisticated decision-making rules, and unit commitment decisions are not yet fixed.

2.1 Participant model

We consider the actions of N_p generic entities, or participants, connected to a transmission grid. Each participant i , for example a generator, load, or storage unit, injects power into or extracts power from a fixed location on the network, in two forms (one or both of which may be present for a given participant):

- *Inelastic power flows*, which cannot be influenced by control signals.
- *Elastic power flows*, which are determined by the result of an optimization over possible control actions.

Inelastic power flows

The inelastic, or exogenous, injection or extraction of power for each participant i is modelled as $r_i + G_i\delta$, with positive values denoting a net power injection. Its two components are a nominal prediction $r_i \in \mathbb{R}^T$ plus a linear function $G_i \in \mathbb{R}^{T \times N_\delta T}$ of entries of a random forecast error vector $\delta \in \mathbb{R}^{N_\delta T}$, whose value is to be discovered in the future. It has the form $\delta = [\delta'_0, \dots, \delta'_{T-1}]'$, where each $\delta'_k \in \mathbb{R}^{N_\delta}$. In other words, N_δ is the number of elements in the disturbance vector at a given time, and this vector is mapped to the exogenous power flows in the system at that time. If the prediction error δ is zero, then the net power injection at step j is simply $[r_i]_j$.

The forecast error δ is assumed to belong to a compact set $\Delta := \{\delta \mid S\delta \leq h\}$ with $h \in \mathbb{R}^q$, whose interior contains the origin. Although the error is random, the mean prediction error $\mathbb{E}[\delta]$ and the covariance matrix $\mathbb{E}[\delta\delta'] \in \mathbb{R}^{N_\delta T \times N_\delta T}$, which is symmetric, are assumed to be known. No other restrictions are placed on the probability distribution.

Elastic power flows

Elastic power flows are governed by a participant's dynamics in conjunction with some pre-defined costs. We describe them in state space as is common practice in systems and control ([24], §2.1). At time k , each participant i has internal state $x_k^i \in \mathbb{R}^{n_i}$, where n_i is the state dimension, and is governed by linear time-invariant dynamics, so that given an input u_k^i at time k the state at time $k+1$ is given by $x_{k+1}^i = \tilde{A}_i x_k^i + \tilde{B}_i u_k^i$, where $\tilde{A}_i \in \mathbb{R}^{n_i \times n_i}$ and $\tilde{B}_i \in \mathbb{R}^{n_i}$. The first element $[x_k^i]_1$ of the state vector x_k^i is assumed to represent the current power injection at the relevant node of the transmission network, and other elements are used to model internal dynamics or memory of previous states. The *scalar* input $u_k^i \in \mathbb{R}$ controls the net power injection of the participant at time $k+1$.

Assigning the current time the value $k = 0$, a vector of future states for participant i , $\mathbf{x}^i := [x_1^{i'} \dots x_T^{i'}]' \in \mathbb{R}^{n_i T}$ can be written as a function of the input sequence $\mathbf{u}^i := [u_0^{i'} \dots u_{T-1}^{i'}]' \in \mathbb{R}^T$ and the current state x_0^i :

$$\mathbf{x}^i = A_i x_0^i + B_i \mathbf{u}^i, \quad (1)$$

where

$$A_i := \begin{bmatrix} \tilde{A}_i \\ \tilde{A}_i^2 \\ \vdots \\ \tilde{A}_i^T \end{bmatrix}, \quad B_i := \begin{bmatrix} \tilde{B}_i & 0 & \dots & 0 \\ \tilde{A}_i \tilde{B}_i & \tilde{B}_i & \ddots & 0 \\ \vdots & \ddots & \ddots & 0 \\ \tilde{A}_i^{T-1} \tilde{B}_i & \dots & \tilde{A}_i \tilde{B}_i & \tilde{B}_i \end{bmatrix}.$$

The vector of outputs $C_i \mathbf{x}^i$ as seen by the network is just the power injected or consumed by the participant. Therefore each matrix $C_i \in \mathbb{R}^{T \times n_i T}$ selects only the first element of the state vector at each time, i.e. $C_i = I_T \otimes \tilde{C}_i$, where $\tilde{C}_i = [1 \ 0_{1 \times (n_i - 1)}]$.

Costs

The function $J_i : \mathbb{R}^{n_i T} \times \mathbb{R}^T \rightarrow \mathbb{R}$ is used to define costs for the states and inputs along the time horizon. It is assumed that J_i is a quadratic function

$$J_i(\mathbf{x}^i, \mathbf{u}^i) := f_i^{x'} \mathbf{x}^i + \frac{1}{2} \mathbf{x}^{i'} H_i^x \mathbf{x}^i + f_i^{u'} \mathbf{u}^i + \frac{1}{2} \mathbf{u}^{i'} H_i^u \mathbf{u}^i + c_i, \quad (2)$$

where the Hessian matrices H_i^x and H_i^u are assumed to be positive semi-definite, in order for the optimization problem defined in Section 3 to be convex. Linear components f_i^x and f_i^u are of the form $\mathbf{1}_{T \times 1} \otimes \tilde{f}_i^x$ and $\mathbf{1}_{T \times 1} \otimes \tilde{f}_i^u$ respectively, where $\tilde{f}_i^x \in \mathbb{R}^{n_i}$ and $\tilde{f}_i^u \in \mathbb{R}$. Similarly the quadratic components are given by $H_i^x := I_T \otimes \tilde{H}_i^x$ and $H_i^u := I_T \otimes \tilde{H}_i^u$, where $\tilde{H}_i^x \in \mathbb{R}^{n_i \times n_i}$ and $\tilde{H}_i^u \in \mathbb{R}$. Coupling costs between time steps can be represented by augmenting the state vector to include a memory of prior states in the state vector. Constant $c_i := T \tilde{c}_i$ allows for a constant stage cost $\tilde{c}_i$.

Constraints

The set $\mathcal{Z}_i$ consists of permissible combinations of state and input sequences $\mathbf{x}^i$ and $\mathbf{u}^i$ for participant i , which may in some cases be additionally constrained by δ . It is a compact set defined by l_i linear inequalities (i.e. a polytope) and takes the form

$$\mathcal{Z}_i := \left\{ \begin{bmatrix} \mathbf{x}^i \\ \mathbf{u}^i \\ \delta \end{bmatrix} \left| T_i \mathbf{x}^i + U_i \mathbf{u}^i + V_i \delta \leq w_i \right. \right\}, \quad (3)$$

where $T_i \in \mathbb{R}^{l_i \times n_i T}$, $U_i \in \mathbb{R}^{l_i \times T}$, $V_i \in \mathbb{R}^{l_i \times N_\delta T}$ and $w_i \in \mathbb{R}^{l_i}$. Of course, $\mathbf{x}^i$ and $\mathbf{u}^i$ are related by the dynamic equation (1), and T_i , U_i , V_i , and w_i may also depend on the current state x_0^i ;

these dependences are left out of the notation above for clarity. Note that since $\mathbf{x}^i$ and $\mathbf{u}^i$ are trajectories rather than state or input vectors corresponding to a single time, a wide range of constraints coupling states and inputs can be modelled. For example, ramp rates may be imposed on generators, and empty/full constraints may be imposed on storage units. Binary variables, allowing for example start-up and shut-down constraints, are not considered in this paper.

Usually $V_i = 0$, unless the uncertainty feeds directly into the participant's operating constraints. An example of this would be a curtailable wind farm whose maximum power availability at any given time is uncertain, and whose power output could be varied at any time between zero and this upper limit. In this paper, though, wind curtailment is assumed to be undesirable.

2.2 Network model

The network model is a standard linearized approximation of a high-voltage transmission grid [25], in which lines are lossless, voltage magnitudes are constant, and line flows are proportional to the phase differences (assumed to be small) between nodal voltages. Let each participant be connected to one of N_n network nodes, and let L be the number of lines connecting these nodes.

The network imposes two constraints on power system operation. The first is that the *net* power injection, comprising the sum of inelastic flows $[r_i + G_i\delta]_k$ and elastic flows $[C_i\mathbf{x}^i]_k$, has to be zero at all times $k = 1, \dots, T$. This can be modelled using an equality constraint with T rows:

$$\sum_{i=1}^{N_p} (r_i + G_i\delta + C_i\mathbf{x}^i) = 0. \quad (4)$$

The second constraint is that line currents cannot exceed the respective line ratings anywhere on the network, at any time. Under the preceding assumptions, this constraint is linear in the power injections, as long as the net power injection into the network is zero (i.e. condition (4) holds) [25]. Hence an additional vector inequality constraint

$$\sum_{i=1}^{N_p} \Gamma_i (r_i + G_i\delta + C_i\mathbf{x}^i) \leq \bar{p}. \quad (5)$$

This has $2LT$ rows, one for each flow direction, for each line, at each time. Each matrix $\Gamma_i \in \mathbb{R}^{2LT \times T}$ maps the power output of the node to which participant i is attached to contributions to line flows. Each Γ_i can be constructed from the network line impedances using the derivation of equation (III.4) in [25], since we model line constraints as limits on the phase angle differences between adjacent transmission buses.

3 Choosing optimal reserve policies

Current reserve mechanisms use a cascaded loop structure, where the fastest (primary) controller stabilizes the grid frequency, a minutes-scale (secondary) controller corrects it back to its reference, and slower, separately-purchased tertiary reserves redispatch generators in order to free up the margins within which the faster control operates [23]. This reserve action is only a real-time response to the error as it unfolds, and makes no systematic use of what is expected to happen in future. Intraday electricity markets in many countries are currently experiencing dramatically increasing trade volumes [26], and this increase can be seen as an attempt to adjust the short-term economic operation of the power system in the light of new forecast information. Different countries operate these markets in diverse ways; an overview of the various mechanisms used to acquire reserves and short-term power commitments in European countries can be found in [27]. Such trading actions take little systematic account of time-coupled costs and constraints imposed on the market participants.

In this section we describe a more systematic predictive mechanism that explicitly takes account of short-term uncertainties with the aim of reducing the expected running costs of the power system over the time horizon.

3.1 Finite horizon optimization

Consider the problem of minimizing expected running costs $\sum_{i=1}^{N_p} \mathbb{E}[J_i(\mathbf{x}^i, \mathbf{u}^i)]$ over a horizon of length T , subject to the local constraints (3) and network constraints (4) and (5). We do this by choosing a sequence of control inputs $\mathbf{u}^i$ for each participant i that can vary with δ . We wish to choose the best causal response to prediction errors, a *policy* $\mathbf{u}^i = \pi_i(\delta)$, where $\pi_i : \mathbb{R}^{N_\delta T} \rightarrow \mathbb{R}^T$ is to be chosen before the error is known. “Causal” means that u_m^i can depend only on the measurements of $\delta_0, \delta_1, \dots, \delta_m, \delta_{m+1}$. That is, we assume that δ_{m+1} , the sub-vector of δ pertaining to time $m+1$, is revealed just *before* input u_m^i is applied. Obviously, a dependence on any of $\delta_{m+2}, \dots, \delta_{T-1}$ would violate causality because u_m^i would be a function of information not yet available at time m .

Substituting $\mathbf{u}^i = \pi_i(\delta)$ into the state update equation (1) and eliminating $\mathbf{x}^i$, we obtain

the following finite horizon optimization problem:

$$\min_{\text{Causal } \pi_i} \sum_{i=1}^{N_p} \mathbb{E}[J_i(A_i x_0^i + B_i \pi_i(\delta), \pi_i(\delta))] \quad (6a)$$

$$\text{s.t. } \sum_{i=1}^{N_p} r_i + G_i \delta + C_i(A_i x_0^i + B_i \pi_i(\delta)) = 0, \forall \delta \in \Delta, \quad (6b)$$

$$\sum_{i=1}^{N_p} \Gamma_i(r_i + G_i \delta + C_i(A_i x_0^i + B_i \pi_i(\delta))) \leq \bar{p}, \forall \delta \in \Delta, \quad (6c)$$

$$\begin{bmatrix} A_i x_0^i + B_i \pi_i(\delta) \\ \pi_i(\delta) \\ \delta \end{bmatrix} \in \mathcal{Z}_i, \forall \delta \in \Delta. \quad (6d)$$

Constraints (6b) and (6c) are the expanded forms of (4) and (5) after substituting definitions of $\mathbf{x}^i$ and $\mathbf{u}^i$, so that the optimization is expressed only in terms of π_i .

This problem is intractable due to the wide variety of candidate functions π_i that could satisfy the constraints. We therefore restrict ourselves from now on exclusively to policies of the affine form

$$\mathbf{u}^i = D_i \delta + e_i, \quad (7)$$

so that participant i 's power schedule $\mathbf{u}^i$ is parameterized by a nominal schedule $e_i = [e_0^i \dots e_{T-1}^i]'$ plus a linear variation D_i with future prediction errors. In order for the use of future disturbances to be causal, D_i takes the lower-triangular form

$$D_i = \begin{bmatrix} [D_i]_{0,0} & 0 & \cdots & 0 \\ [D_i]_{1,0} & [D_i]_{1,1} & \ddots & \vdots \\ \vdots & \ddots & \ddots & 0 \\ [D_i]_{T-1,0} & \cdots & [D_i]_{T-1,T-2} & [D_i]_{T-1,T-1} \end{bmatrix}$$

where $[D_i]_{l,m} \in \mathbb{R}^{1 \times N_\delta}$ is the response of input u_l^i to error δ_{m+1} . The presence of non-zero elements above the diagonal would violate causality, because the values of as-yet-unknown errors would contribute to the control rule.

Constraint (6d) and the causality requirement are rewritten for compactness as a set of admissible policies (D_i, e_i) parameterized by the current state x_0^i :

$$\mathcal{F}_i(x_0^i) = \left\{ (D_i, e_i) \left| \begin{array}{l} [D_i]_{l,m} = 0, \quad \forall m > l \\ \begin{bmatrix} A x_0^i + B_i(D_i \delta + e_i) \\ D_i \delta + e_i \\ \delta \end{bmatrix} \in \mathcal{Z}_i, \forall \delta \in \Delta \end{array} \right. \right\}$$

This leads to the following rewriting of problem (6) in terms of nominal schedules $\{e_i\}_{i=1}^{N_p}$ and policy matrices $\{D_i\}_{i=1}^{N_p}$:

$$\min_{(D_i, e_i) \in \mathcal{F}_i(x_0^i)} \sum_{i=1}^{N_p} \tilde{J}_i(x_0^i, D_i, e_i) \quad (8a)$$

$$\text{s.t. } \sum_{i=1}^{N_p} r_i + G_i \delta + C_i(A_i x_0^i + B_i(D_i \delta + e_i)) = 0, \quad \forall \delta \in \Delta, \quad (8b)$$

$$\sum_{i=1}^{N_p} \Gamma_i(r_i + G_i \delta + C_i(A_i x_0^i + B_i(D_i \delta + e_i))) \leq \bar{p}, \quad \forall \delta \in \Delta. \quad (8c)$$

The objective function has been redefined as $\tilde{J}_i(x_0^i, D_i, e_i) := \mathbb{E}[J_i(\mathbf{x}^i, \mathbf{u}^i)]$ to reflect its dependence on x_0^i , D_i , and e_i .

The modelling assumption of a positive semidefinite quadratic form (2) for $J_i(\mathbf{x}^i, \mathbf{u}^i)$ allows the expectation over δ to be minimized straightforwardly in comparison to the arbitrary case, since only the moments $\mathbb{E}[\delta]$ and $\mathbb{E}[\delta\delta']$ are needed. Substitution from (2) gives the following representation of the objective, which is convex:

$$\begin{aligned} \tilde{J}_i(x_0^i, D_i, e_i) &= \mathbb{E}[J_i(A_i x_0^i + B_i(D_i \delta + e_i), D_i \delta + e_i)] \\ &= f_i^{x'}(A_i x_0^i + B_i e_i) + f_i^{u'} e_i + x_0^{i'} A_i' H_i^x B_i e_i \\ &\quad + \frac{1}{2} x_0^{i'} A_i' H_i^x A_i x_0^i + \frac{1}{2} e_i' (B_i' H_i^x B_i + H_i^u) e_i \\ &\quad + (f_i^{x'} B_i + f_i^{u'} + x_0^{i'} A_i' H_i^x B_i \\ &\quad \quad + e_i' B_i' H_i^x B_i + e_i' H_i^u) D_i \mathbb{E}[\delta] \\ &\quad + \frac{1}{2} \langle D_i' (B_i' H_i^x B_i + H_i^u) D_i, \mathbb{E}[\delta\delta'] \rangle + c_i \end{aligned}$$

Since the expected prediction error $\mathbb{E}[\delta]$ can always be set to zero (the reference predictions r_i would always be chosen with $\mathbb{E}[\delta] = 0$), the second-to-last term in general cancels. Note that although the constant term c_i makes no difference to the solutions D_i and e_i , it is needed later in order to compare the costs of different approaches.

3.2 Equivalent tractable reformulation

Problem (8) cannot be solved directly because constraints (8b) and (8c), as well as the definition of $\mathcal{F}_i(x_0^i)$, apply for all $\delta \in \Delta$ and are therefore the intersection of an infinite number of constraints. To obtain a numerical solution they must be written in an equivalent finite form.

Since Δ is assumed to have an interior containing the origin, i.e. no redundant components exist in δ , it can be shown that constraint (8b) is satisfied if and only if the following conditions

hold:

$$\sum_{i=1}^{N_p} (r_i + C_i A_i x_0^i + C_i B_i e_i) = 0, \quad (9a)$$

$$\sum_{i=1}^{N_p} (G_i + C_i B_i D_i) = 0. \quad (9b)$$

Constraint (8c) and the sets $\mathcal{F}_i(x_0^i)$ can be written using a result due to Guslitser and others [14, 15], and employed in [19] to solve a similar robust control problem to this one.

Recalling that $\Delta = \{\delta \mid S\delta \leq h\}$, the following equivalences hold for (8c). An extra matrix variable Z is introduced for the last equivalence, which uses strong duality in linear programming.

$$\begin{aligned} & \sum_{i=1}^{N_p} \Gamma_i (r_i + G_i \delta + C_i (A_i x_0^i + B_i (D_i \delta + e_i))) \leq \bar{p}, \forall \delta \in \Delta \\ & \quad \Updownarrow \\ & \max_{\delta \in \Delta} \sum_{i=1}^{N_p} \Gamma_i (G_i + C_i B_i D_i) \delta + \sum_{i=1}^{N_p} \Gamma_i C_i B_i e_i \\ & \quad \leq \bar{p} - \sum_{i=1}^{N_p} \Gamma_i (r_i + C_i A_i x_0^i) \\ & \quad \Updownarrow \\ & \left\{ \begin{array}{l} \exists Z: Z'h + \sum_{i=1}^{N_p} \Gamma_i C_i B_i e_i \leq \bar{p} - \sum_{i=1}^{N_p} \Gamma_i (r_i + C_i A_i x_0^i), \\ \sum_{i=1}^{N_p} \Gamma_i (G_i + C_i B_i D_i) = Z'S, \text{ and } Z \geq 0 \text{ element-wise.} \end{array} \right\} \end{aligned}$$

Similarly, it can be shown that the sets $\mathcal{F}_i(x_0^i)$ can be rewritten in finite form as follows, starting from definition (3) and introducing extra matrix variables Y_i of appropriate dimension:

$$\mathcal{F}_i(x_0^i) = \left\{ (D_i, e_i) \left| \begin{array}{l} [D_i]_{l,m} = 0, \forall m > l \\ \exists Y_i \geq 0: (T_i B_i + U_i) D_i + V_i = Y_i' S, \\ T_i A_i x_0^i + (T_i B_i + U_i) e_i + Y_i' h \leq w_i \end{array} \right. \right\}$$

These changes lead to the following tractable representation of optimization (8):

$$\min_{Z \geq 0, (D_i, e_i) \in \mathcal{F}_i(x_0^i)} \sum_{i=1}^{N_p} \tilde{J}_i(x_0^i, D_i, e_i) \quad (10a)$$

$$\text{s.t.} \quad \sum_{i=1}^{N_p} (r_i + C_i A_i x_0^i + C_i B_i e_i) = 0, \quad (10b)$$

$$\sum_{i=1}^{N_p} (G_i + C_i B_i D_i) = 0, \quad (10c)$$

$$Z' h + \sum_{i=1}^{N_p} \Gamma_i C_i B_i e_i \leq \bar{p} - \sum_{i=1}^{N_p} \Gamma_i (r_i + C_i A_i x_0^i), \quad (10d)$$

$$\sum_{i=1}^{N_p} \Gamma_i (G_i + C_i B_i D_i) = Z' S. \quad (10e)$$

In summary, (10b) states that the nominal schedules of power output changes e_i should track the base prediction; (10c) states that the rules D_i used by the participants should together track any error vector $\delta \in \Delta$; (10d) and (10e) ensure that line current limits should not be exceeded for any $\delta \in \Delta$.

After solving (10) the state and input trajectories $\mathbf{x}^i$ and $\mathbf{u}^i$ for a particular prediction error δ can be computed by substituting the solution (D_i, e_i) back into (7) and (1).

3.3 Computational issues

Problem (10) is a quadratic program, which in principle can be solved even where many thousands of variables and constraints are present. We now comment on the size and structural properties of the problem. Each vector e_i has T elements, each matrix D_i has $N_\delta T^2$ elements (neglecting the fact that some of these are constrained to be zero), and each matrix Y_i (introduced by definition of the sets $\mathcal{F}_i(x_0^i)$) has $q l_i$ elements, recalling that q is the number of constraints defining Δ and l_i is the number of constraints defining $\mathcal{Z}_i$. The matrix Z has $2qLT$ elements. Therefore the total number of primal optimization variables is $N_p(T + N_\delta T^2 + q\bar{l}) + 2qLT$, where $\bar{l} = \frac{1}{N_p} \sum_{i=1}^{N_p} l_i$. The main computational cost arises from matrices D_i which together have $N_p N_\delta T^2$ elements. Clearly, the problem size already reaches the thousands for modest parameter choices.

However for computational purposes the structure of the problem is as important as the size. The form of (10) exhibits a convenient linear coupling between participants $i = 1, \dots, N_p$ in both the cost function and the constraint set, and in fact lends itself straightforwardly to solution via a large-scale distributed solution method, such as the recently-revived ADMM [28].

4 Properties of affine reserve policies

We now highlight some fundamental properties of policy-based reserves. We use the word “policy” loosely to refer to the matrix D_i (rather than the nominal component e_i) in what follows.

Property 1. *Assume that for all participants $[x_{k+1}^i]_1 = u_k^i$. Constraint (10c) is equivalent to $\sum_{i=1}^{N_p} D_i = -\sum_{i=1}^{N_p} G_i$.*

Recall that from the model definition,

$$\begin{aligned} C_i B_i &= [I_T \otimes [1 \ 0_{1 \times (n_i-1)}]] \begin{bmatrix} \tilde{B}_i & 0 & \cdots & 0 \\ \tilde{A}_i \tilde{B}_i & \tilde{B}_i & \ddots & \vdots \\ \vdots & \ddots & \ddots & 0 \\ \tilde{A}_i^{T-1} \tilde{B}_i & \cdots & \tilde{A}_i \tilde{B}_i & \tilde{B}_i \end{bmatrix} \\ &= \begin{bmatrix} [\tilde{B}_i]_1 & 0 & \cdots & 0 \\ [\tilde{A}_i \tilde{B}_i]_1 & [\tilde{B}_i]_1 & \ddots & \vdots \\ \vdots & \ddots & \ddots & 0 \\ [\tilde{A}_i^{T-1} \tilde{B}_i]_1 & \cdots & [\tilde{A}_i \tilde{B}_i]_1 & [\tilde{B}_i]_1 \end{bmatrix}. \end{aligned}$$

The assumption, as described in Section 2.1, is that the first state (the participant’s net power infeed) is set directly by the input decision at the previous time step, and not as a function of current states. Therefore the first row of $\tilde{A}_i$ contains only zeros, and $[\tilde{B}_i]_1 = 1$. From this it can easily be shown that $C_i B_i = I_T$, from which the property follows immediately.

As an example, if a single source of uncertainty were present that maps directly to the power output of one participant, one would have $\sum_{i=1}^{N_p} D_i = -I_T$, so that the diagonal components of D_i sum to -1 , and the off-diagonal entries cancel.

Property 2. *No freedom exists in the choice of policies unless more than one participant uses them.*

This property follows directly from Property 1, and is to be expected. Consider the example of a single generator supplying an uncertain fluctuating load. The generator must track the power requirement at every time instant and there is no freedom to plan this task strategically. If one or more additional generators were to become available, tracking could be planned in many different ways according to the characteristics of the generators, thanks to the extra degrees of control freedom the additional generators would bring.

Property 3. Assuming that the mappings G_i are memoryless, i.e. $G_i = I_T \otimes \tilde{G}_i$, the sum over all participants of a given sub-diagonal entry in the D -matrix must be zero, i.e. $\sum_{i=1}^{N_p} [D_i]_{l,m} = 0$, $\forall l > m$.

This is seemingly counter-intuitive, because it implies that all the “interesting” parts of the participants’ policies should ultimately cancel each other out. However through the definition of the feasible set $\mathcal{F}_i(x_0^i)$, the choice of D_i has a bearing on what nominal trajectories e_i are feasible for a given participant. Since both D_i and e_i determine the real behaviour of each participant, operating costs may be affected significantly.

5 Implementation of policy-based reserves

Reserve provision in electrical networks is increasingly a priced, rather than regulated, commodity [27]. In order for *policy-based* reserve provision to be compatible with liberalized electricity markets, there must be a clear indication to market participants of the value of offering these more elaborate services. That is to say, a price must be placed on the requirement for participants to respond in certain ways to wind prediction errors. In this section, the Lagrangian of problem (10) is used to show that efficient market prices exist for policies and that an exact analogue of the standard Locational Marginal Prices (LMPs), which arise in electricity markets from network congestion over a power system [23], can be defined for policy-based reserve products. We then discuss the important practical implications of trying to implement policy-based reserves.

5.1 Efficient prices for policies

A partial Lagrangian of problem (10) (keeping the constraints $(D_i, e_i) \in \mathcal{F}_i(x_0^i)$ and $Z \geq 0$ but relaxing all others), $L(Z, D_1, e_1, \dots, D_{N_p}, e_{N_p}, \lambda, \Pi, \nu, \Psi)$, can be formed by introducing the multipliers $\lambda \in \mathbb{R}^T$ for violation of constraint (10b), $\Pi \in \mathbb{R}^{T \times N_\delta T}$ for (10c), $\nu \in \mathbb{R}_{\geq 0}^{2LT}$ for

(10d), and $\Psi \in \mathbb{R}^{2LT \times N_\delta}$ for (10e). The Lagrangian thus has the form

$$\begin{aligned}
L(Z, D_1, e_1, \dots, D_{N_p}, e_{N_p}, \lambda, \Pi, \nu, \Psi) = & \\
& \sum_{i=1}^{N_p} \tilde{J}_i(x_0^i, D_i, e_i) + \lambda' \left(\sum_{i=1}^{N_p} r_i + C_i A_i x_0^i + C_i B_i e_i \right) \\
& + \left\langle \Pi, \sum_{i=1}^{N_p} G_i + C_i B_i D_i \right\rangle \\
& + \nu' \left(Z'h + \sum_{i=1}^{N_p} \Gamma_i C_i B_i e_i - \bar{p} + \sum_{i=1}^{N_p} \Gamma_i (r_i + C_i A_i x_0^i) \right) \\
& + \left\langle \Psi, \sum_{i=1}^{N_p} \Gamma_i (G_i + C_i B_i D_i) - Z'S \right\rangle
\end{aligned} \tag{11}$$

After some rearrangement, this partial Lagrangian can be rewritten in separable form as

$$\begin{aligned}
L(Z, D_1, e_1, \dots, D_{N_p}, e_{N_p}, \lambda, \Pi, \nu, \Psi) = & \\
& \sum_{i=1}^{N_p} (\tilde{J}_i(x_0^i, D_i, e_i) - \lambda'_i e_i - \langle \Pi_i, D_i \rangle) \\
& + \nu' Z'h - \langle \Psi, Z'S \rangle + f(\lambda, \Pi, \nu, \Psi)
\end{aligned} \tag{12}$$

where f is constant with respect to the primal variables D_i , e_i , and Z . The Lagrange multipliers from optimization problems are commonly interpreted as prices, and here we have in effect defined two prices. The first is a nodal power price

$$\lambda_i := -B'_i C'_i (\lambda + \Gamma'_i \nu),$$

consisting of a global component depending on λ and a local component (induced by any line congestion present) depending on ν . This agrees with the standard derivation of locational marginal prices (LMPs) in optimal power flow theory. The second is a matrix of reserve policy prices

$$\Pi_i := -B'_i C'_i (\Pi + \Gamma'_i \Psi),$$

whose entries are the marginal value of each element of D_i . Note that the elements of Π_i above the main diagonal are not required, since these are related to entries that would anyway result in non-causal responses to prediction errors, were they to be different from zero.

As discussed in Section 4, $B_i C_i = I$ in most cases, so that usually $\lambda_i = -(\lambda + \Gamma'_i \nu)$ and $\Pi_i = -(\Pi + \Gamma'_i \Psi)$. The minus signs are a result of the sign convention used to write constraints (10b) and (10c). The identical form of λ_i and Π_i suggests that optimal reserve prices for policies exhibit the same locational variation as LMPs.

Because the Lagrangian is separable, the terms $\lambda'_i e_i$ and $\langle \Pi_i, D_i \rangle$ can be identified as the efficient payments to each participant i for committing to nominal plan e_i and reserve

policy D_i . The payments represent the money transfers that would result from a market mechanism that solved problem (10) efficiently. Under such a scheme, the expected profit made by participant i would be equal to $-\tilde{J}_i(x_0^i, D_i, e_i) + \lambda_i' e_i + \langle \Pi_i, D_i \rangle$.

5.2 Policy-based reserve products

A natural question is what physical commitment a participant makes when implementing a given policy (D_i, e_i) . Clearly the nominal part e_i is the schedule participant i will follow if predictions turn out to have been made with perfect accuracy, i.e. $\delta = 0$. The interpretation of D_i is more subtle and can be termed in two ways, which will be described here. In this subsection the analysis is given for a single uncertainty source, i.e. $N_\delta = 1$; the case for $N_\delta > 1$ is analogous.

Firstly, each *row* l of D_i can be read as the rule the participant must follow to construct its input u_l^i , which for the realized errors $\delta_0, \dots, \delta_l$ determines the power it injects at time $l + 1$:

$$u_l^i = [e_i]_l + \sum_{m=0}^l [D_i]_{l,m} \delta_m$$

Secondly, each *column* m of D_i (reading down from the diagonal) is, in control terminology, the planned *impulse response* $g(\delta_{m+1})$ of participant i to a unit prediction error m steps from the current time (recalling that δ_{m+1} is revealed just before u_m^i is applied):

$$g(\delta_{m+1}) = [[D_i]_{m,m}, [D_i]_{m+1,m}, \dots, [D_i]_{T-1,m}]$$

Example product

Consider the example of the decision rule governing u_l^i , which sets the power participant i supplies during step $l + 1$ of the planning horizon. For given choices of $[D_i]_{l,0}$, $[D_i]_{l,1}$, up to $[D_i]_{l,l}$ agreed, the payment (using the price notation from Section 5.1) made to participant i for the reserve service would be $\sum_{m=0}^l [\Pi_i]_{l,m} [D_i]_{l,m}$ and the payment for scheduled power $[e_i]_l$ would be $[\lambda_i]_l [e_i]_l$. An analogous product could be sold based on the column-wise reading of D_i , in which case the participant would be selling an *a posteriori* response to errors.

Existing reserve mechanisms could be modelled by matrices D_i for which only the main diagonal is populated. In secondary reserves provided by conventional generators, feedback controllers use the frequency deviation, in the form of the Area Control Error (ACE) signal, to adjust their power outputs to follow load mismatches. For a unit deviation from the net load reference, each generator will end up with an offset that depends on its controller parameters. For such a unit load deviation at time l , this offset is in our notation exactly the matrix entry $[D_i]_{l,l}$.

Therefore, a simple way of comparing policy-based reserves to existing mechanisms is to restrict the structure of the participants' D -matrices accordingly and inspect the results. This is demonstrated in Section 6.

5.3 Real time operation

For continuous operation of the power system, it is necessary to choose new policies periodically, because the policies only apply for the following T steps at the time when they are chosen. Furthermore the optimal policies are a function of the current state of the system, and it may be attractive to choose new policies early in the light of new forecast information. Therefore a systematic way of choosing policies repeatedly is required. Two possible schemes for such "closed-loop" operation are:

- **Batchwise:** Set policies for a horizon of T steps, let all T steps play out, then choose a new batch of policies once the current ones have expired.
- **Receding horizon:** Let only the first step play out, then immediately update the policies for the next T steps.

Clearly, a middle road between these two options also exists, namely letting some of the T steps play out, then discarding the remainder and choosing new policies.

The receding horizon scheme presents another choice — whether to honour previous policies in the new choices for D_i (respectively e_i). This would be done by shifting the matrices (resp. vectors) upward and leftward (resp. upward) by one element, then optimizing over the bottom row of elements (resp. element) to obtain new policies. These new policies would be feasible with respect to $\mathcal{F}_i(x_0^i)$ as well as the global constraints (10b)-(10e) under mild assumptions on Δ (for conciseness this is stated without proof here).

An alternative to this is to reject the previous policies and choose fresh values for D_i and e_i at every step. This option is attractive because it allows new (presumably better) policies to be chosen in the light of new information as soon as it becomes available. However its drawback is that due to the repeated renewal process, only the $(0,0)$ block of the D -matrix ever gets used, and no policies beyond the first row ever appear to be implemented. This conflicts with the ideas developed in Section 5.2, in that contracts for policy-based reserves would be agreed but then never called on. It is important to note, however, that the optimal values of $[e_i]_0$ and $[D_i]_{0,0}$ would be affected strongly by the costs and constraints modelled for steps 1 to $T-1$, even though those later steps would never be realized. This means that under this scheme, any cost savings from employing reserve policies are ultimately to be found in the more intelligent choice of $[e_i]_0$ and $[D_i]_{0,0}$. This effect is reported in Section 6.

Rejecting previous policies at each time step makes choosing correct payments to market participants difficult. One way of overcoming this would be instead to define the new policies

as deviations from shifted versions of the existing previous policies, with payments settled additively. Under such a scheme there would be T payments for the reserve action undertaken at a given time, resulting from the superposition of policy choices made over the last T steps.

6 Numerical case study

We now apply policy-based reserves to a standard test network that has been adapted to include a large share of wind power. Policies are recomputed in a receding horizon fashion (the second method described in Section 5.3) over a three-day simulated period in order to assess the reserve costs incurred. The test is repeated 100 times with different realizations of the random wind infeed. The effects of restrictions on the structure of the matrices D_i on the cost of reserves are reported, leading to observations on the cost savings facilitated by recourse. The optimization problems have been solved directly using CPLEX.

The network used is a modification of the 39 bus network described in Appendix A of [29], and shown in Fig. 1. This network contains 7 thermal generators, 2 storage units, 19 loads, and 3 wind farms (which replace 3 of the original 10 generators). We assume that the generators represent the plants that have been selected for use via an earlier unit commitment decision. The parameters in terms of the definitions in Section 2.1 are described in Table 1. The daily pattern of load variation shown with the thick black line in Fig. 3 was taken from data for total UK national electrical consumption on 14th September 2012 (available at <http://www.bmreports.com>), normalized to the size of each load modelled. Peak load is around 6 GW, and wind power provides 3 GW at maximum. Line flows from bus 16 to 15 and from bus 16 to 17 were restricted to 1000 MW. The load sizes p_{nom} in Table 1 are the nominal values described in [29]. The simulation period was three days, divided into 288 fifteen-minute time steps. The horizon length was $T = 8$ steps.

6.1 Uncertainty model

Uncertainties in the system were assumed to originate only in the random wind power availability (loads were assumed to be predicted exactly). The wind farm output was driven by the following first order random process model with saturation:

$$q_{k+1} = \min\{\max\{q_{\min}, q_k + \beta_k\}, q_{\max}\},$$

where $q_k \in \mathbb{R}^{N_\delta}$ denotes the state of the uncertainty model, and $\beta_k \sim N(0, \Sigma)$ is sampled at each step k from a multivariate normal distribution with variance $\Sigma \in \mathbb{R}^{N_\delta \times N_\delta}$, truncated to bounds $A_\beta \beta_k \leq b_\beta$.

Defining $q := [q'_1 \dots q'_T]'$ as the random future evolution of q from current state q_0 , the nominal predictions of wind farm power output r_i were mapped linearly from $\mathbb{E}[q]$, so that

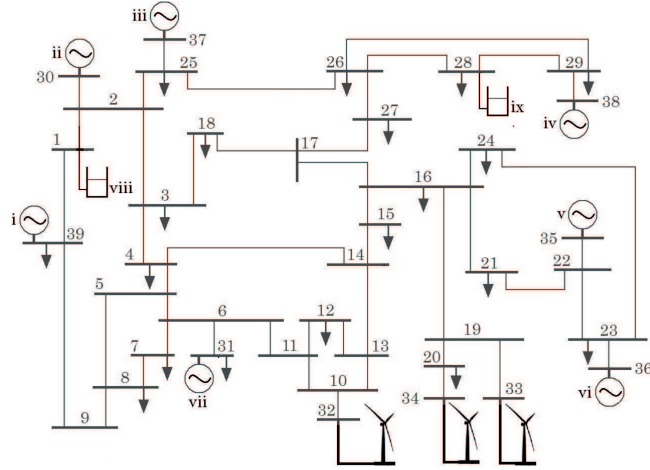


Figure 1: 39 bus test network from [29], with wind infeed replacing thermal generators at nodes 32, 33, and 34, and with added storage units at nodes 1 and 28.

$r_i = G_i \mathbb{E}[q]$, where G_i is the same matrix as that described in Section 2.1. The prediction error was defined as $\delta := q - \mathbb{E}[q]$ so that $\mathbb{E}[\delta] = 0$. The prediction error covariance is then $\mathbb{E}[\delta\delta'] = \mathbb{E}[(q - \mathbb{E}[q])(q - \mathbb{E}[q])']$. This was supplied together with the references r_i and the current system state x_0^i as inputs to optimization problem (10).

The uncertainty set Δ was recomputed as a function of the current state, to reflect the fact that prediction errors are bounded relative to the nominal predictions by the wind farm power output limits and by the bounds assumed on β_k , the change in wind power availability at each step. Its new parameters S and h were then supplied to (10). In addition, at every simulation time step, an aggregation of 20,000 Monte Carlo runs was used to produce T -step nominal predictions r_i for each wind farm, as well as estimates of $\mathbb{E}[\delta\delta']$, the variance of the error relative to the nominal value.

The parameters defining the uncertainty model in this case study are given in Table 2. The three wind farms are driven by two temporally and spatially correlated sources of uncertainty. The matrices G_i for the wind farms are of the form $G_i = I_T \otimes \tilde{G}_i$, and the matrices $\tilde{G}_i$ are given in Table 1. The output of the wind farm at node 34 is the mean of the two at nodes 32 and 33. The purpose of this formulation is to show that random power flows can be driven by a process with dimension lower than the number of nodes affected, either to save computational effort, or because the uncertainty is anyway difficult to model.

An example time series q_k generated in this way is shown in Fig. 2.

6.2 Comparing reserve costs

For each of the 100 wind realization tests, three parallel models of the power system were driven by the same realizations of the random wind model described above. The observed

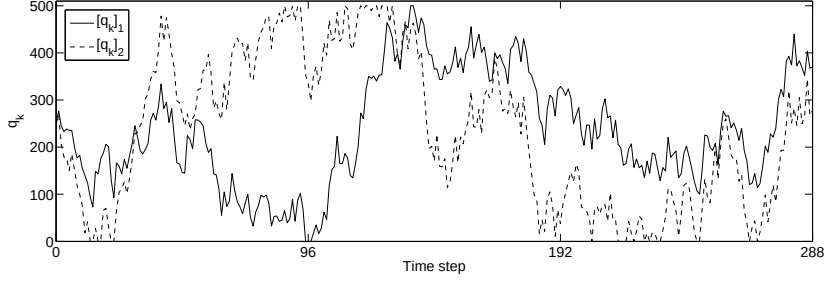


Figure 2: Example output of correlated uncertainty model q_k , which drives the wind farm outputs in the case study. The solid line represents $[q_k]_1$ and the dotted line $[q_k]_2$, for the 100th realization used.

operating costs under receding horizon control over the simulation period were then compared under the three schemes, which were defined as follows:

1. Prescient case: Disturbances are known at the time the finite-horizon optimization is carried out. Matrices D_i are therefore not needed, and nominal schedules e_i track the power reference perfectly. This model, which results in the best attainable receding-horizon cost, is used as a point of comparison for the other two.
2. Flexible-rate reserves: $[D_i]_{l,m} = 0$ for $l \neq m$, for all i . This represents the best possible response to uncertainty without using recourse, and the optimization is over the elements of e_i and the diagonal parts of D_i .
3. Policy-based reserves: $[D_i]_{l,m} = 0$ for $l < m$, for all i . This allows full use of the extra information that will be available at each time step when the reserve is deployed.

The total operation cost was measured from the state and input values $x^i(t)$ and $u^i(t)$ realized by the elastic participants at each time step t over the simulation period,

$$\sum_{t=1}^{288} \sum_{i=1}^{N_p} \left[\tilde{f}_i^{x'} x^i(t) + \frac{1}{2} x^{i'}(t) \tilde{H}_i^x x^i(t) + \tilde{f}_i^{u'} u^i(t-1) + \frac{1}{2} u^{i'}(t-1) \tilde{H}_i^u u^i(t-1) + \tilde{c}_i \right].$$

The inputs are indexed by $(t-1)$ because state $x(0)$ is given whereas input $u(0)$ must be chosen and determines $x(1)$, and so on.

An example of the power output traces for the generators is given in Fig. 3. The cost results are shown in Table 3. A cost of reserves is defined for Schemes 2 and 3 as the operation cost experienced minus the prescient cost (from Scheme 1). This represents the cost incurred in order to accommodate the uncertain wind infeed. Across the 100 runs, the cost of reserves

decreased by an average of 34.5 % for full policies (Scheme 3) with respect to the best possible non-recourse reserve scheduler (Scheme 2). Average costs under Scheme 1 were 4.318×10^7 for the three-day test, and reserves were found to incur up to 1 % of additional total power generation costs in the tests.

Another test was carried out allowing only the diagonal and immediate subdiagonal entries in the D -matrices to differ from zero, representing a “mixture” of Schemes 2 and 3. The average savings in the cost of reserves, measured in the same way as for Scheme 3, were 32.4 %, indicating that most of the 34.5 % savings can be obtained from using just a two-step policy rather than a full policy (in this case 8 steps). Whether this is always true, however, is likely to depend strongly on the parameters of the participants connected to the grid.

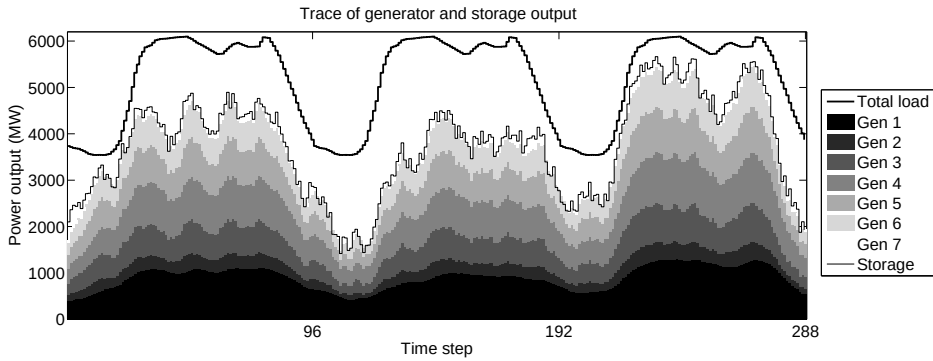


Figure 3: Power output traces for the 100th wind realization test under Scheme 3. Generator outputs are plotted in stacked form, and the total power output of the two storage units is plotted using the thin black line relative to the top of the stack. The wind power injection is the difference between the total load (bold black line) and the sum of storage and generator infeds (thin black line).

7 Conclusions

Motivated by the need to incorporate intermittent renewable energy sources into power systems as intelligently as possible, this paper introduced the idea of policy-based reserves. The approach relies on solving a robust optimization problem to find efficient responses to errors in the prediction of uncertain load or supply, over a finite horizon. Interpretations were developed for policy-based reserves as products that could be bought or sold on power markets, with associated prices. A case study demonstrated the operating principles and benefits of the approach, and insights were gained into the important properties of policy-based reserves.

The cost of reserves measured in this paper were determined in large part by the correlation of the prediction errors. This is evident from the term $\frac{1}{2} \langle D_i' (B_i' H_i^x B_i + H_i^u) D_i, \mathbb{E}[\delta \delta'] \rangle$ in the cost function. Correlation in space and time results in non-zero off-diagonal entries in $\mathbb{E}[\delta \delta']$,

which will change the contributions of individual entries of D_i to the expected costs. It is not surprising, then, given the strong correlation of prediction errors found in the numerical case study, that for a given finite-horizon optimization the costs were reduced when recourse was allowed.

In receding horizon operation, new power schedules are found at every time step. This can be viewed as a form of recourse that is not taken into account for each finite horizon optimization. This leads to the intuition, borne out by the numerical results, that some of the apparent value of optimizing over full lower-triangular policies (rather than diagonal ones) should disappear once the optimization repeated in receding horizon fashion. However, as reported, the cost reduction can still be significant. It was also observed that most of the cost reduction can be gained using only one or two subdiagonal rows in the D -matrices.

Lastly, the interpretation of the reserve cost defined in the case study is important. Scheme 1 represents a lower bound on the cost achievable under any possible receding horizon scheme, however it may not be possible to approach this value using any causal policy. It is unknown whether the affine policies used are close to being the best possible reserve mechanism for this system model, or whether some other policies $\pi_i(\delta)$ could be found that would result in even lower reserve costs. Recent related results on finding performance bounds for affine control policies [30] may provide some insight into this issue.

References

- [1] T. Ackermann, J. R. Abbad, I. M. Dudurych, I. Erlich, H. Holttinen, J. R. Kristoffersen, and P. E. Sorensen, “European balancing act,” *IEEE Power and Energy Magazine*, vol. 5, no. 6, pp. 90–103, 2007.
- [2] D. Newbery, “Market design for a large share of wind power,” *Energy Policy*, vol. 38, no. 7, pp. 3131–3134, 2010.
- [3] G. Giebel, P. Sorensen, and H. Holttinen, “Forecast error of aggregated wind power,” TradeWind, Tech. Rep., 2007. [Online]. Available: http://www.trade-wind.eu/fileadmin/documents/publications/\D2.2_Estimates_of_forecast_error_for_agg
- [4] F. D. Galiana, F. Bouffard, J. M. Arroyo, and J. F. Restrepo, “Scheduling and pricing of coupled energy and primary, secondary, and tertiary reserves,” *Proceedings of the IEEE*, vol. 93, no. 11, pp. 1970–1983, 2005.
- [5] F. Bouffard and F. D. Galiana, “Stochastic security for operations planning with significant wind power generation,” in *2008 IEEE Power and Energy Society General Meeting - Conversion and Delivery of Electrical Energy in the 21st Century*. IEEE, 2008.

- [6] J. M. Morales, A. J. Conejo, and J. Perez-Ruiz, "Economic valuation of reserves in power systems with high penetration of wind power," *IEEE Transactions on Power Systems*, vol. 24, no. 2, pp. 900–910, 2009.
- [7] J. Xiao, B.-M. S. Hodge, J. F. Pekny, and G. V. Reklaitis, "Operating reserve policies with high wind power penetration," *Computers & Chemical Engineering*, vol. 35, no. 9, pp. 1876–1885, 2011.
- [8] M. Vrakopoulou, K. Margellos, J. Lygeros, and G. Andersson, "A probabilistic framework for security constrained reserve scheduling of networks with wind power generation," in *2nd IEEE Conference on Energy and Exhibition*, Florence, Italy, 2012.
- [9] C. C. Holt, F. Modigliani, and H. A. Simon, "A linear decision rule for production and employment scheduling," *Management Science*, vol. 2, no. 1, pp. 1–30, 1955.
- [10] C. C. Holt, "Linear decision rules for economic stabilization and growth," *The Quarterly Journal of Economics*, vol. 76, no. 1, pp. 20–45, 1962.
- [11] E. H. Bowman, "Consistency and optimality in managerial decision making," *Management Science*, vol. 9, no. 2, pp. 310–321, 1963.
- [12] E. A. Silver, "A simple inventory replenishment decision rule for a linear trend in demand," *The Journal of the Operational Research Society*, vol. 30, no. 1, pp. 71–75, 1979.
- [13] D. Kuhn, W. Wiesemann, and A. Georghiou, "Primal and dual linear decision rules in stochastic and robust optimization," *Mathematical Programming*, vol. 130, no. 1, pp. 177–209, 2009.
- [14] E. Guslitser, "Uncertainty-immunized solutions in linear programming," Master's Thesis, Technion - Israel Institute of Technology, 2002.
- [15] A. Ben-Tal, A. Goryashko, E. Guslitser, and A. Nemirovski, "Adjustable robust solutions of uncertain linear programs," *Mathematical Programming*, vol. 99, no. 2, pp. 351–376, 2004.
- [16] P. Rocha and D. Kuhn, "Multistage stochastic portfolio optimisation in deregulated electricity markets using linear decision rules," *European Journal of Operational Research*, vol. 216, no. 2, pp. 397–408, 2012.
- [17] D. Q. Mayne, J. B. Rawlings, C. V. Rao, and P. O. M. Scokaert, "Constrained model predictive control: Stability and optimality," *Automatica*, vol. 36, no. 6, pp. 789–814, 2000.

- [18] J. Löfberg, “Minimax approaches to robust model predictive control,” Ph.D. dissertation, Linköping University, Sweden, 2003. [Online]. Available: <http://www.control.isy.liu.se/research/reports/Ph.D.Thesis/PhD812.pdf>
- [19] P. J. Goulart, E. C. Kerrigan, and J. M. Maciejowski, “Optimization over state feedback policies for robust control with constraints,” *Automatica*, vol. 42, no. 4, pp. 523–533, 2006.
- [20] F. Oldewurtel, A. Parisio, C. N. Jones, D. Gyalistras, M. Gwerder, V. Stauch, B. Lehmann, and M. Morari, “Use of model predictive control and weather forecasts for energy efficient building climate control,” *Energy and Buildings*, vol. 45, no. 0, pp. 15–27, Feb. 2012.
- [21] S. Wang, S. Shahidehpour, D. Kirschen, S. Mokhtari, and G. Irisarri, “Short-term generation scheduling with transmission and environmental constraints using an augmented lagrangian relaxation,” *Power Systems, IEEE Transactions on*, vol. 10, no. 3, pp. 1294–1301, 1995.
- [22] J. Warrington, P. Goulart, S. Mariethoz, and M. Morari, “Robust reserve operation in power systems using affine policies,” in *Proc. of the Conference on Decision and Control*, Maui, Hawaii, 2012.
- [23] S. Stoft, *Power System Economics: Designing Markets for Electricity*, 1st ed. Wiley-IEEE Press, 2002.
- [24] J. Maciejowski, *Predictive Control with Constraints*. Prentice Hall, 2002.
- [25] R. Christie, B. Wollenberg, and I. Wangenstein, “Transmission management in the deregulated environment,” *Proc. of the IEEE*, vol. 88, no. 2, pp. 170–195, 2000.
- [26] C. Weber, “Adequate intraday market design to enable the integration of wind energy into the european power systems,” *Energy Policy*, vol. 38, no. 7, pp. 3155–3163, 2010.
- [27] “Survey on ancillary services procurement and balancing market design, september 2012,” ENTSO-E, Position Paper, 2012.
- [28] S. Boyd, N. Parikh, E. Chu, B. Peleato, and J. Eckstein, *Distributed Optimization and Statistical Learning via the Alternating Direction Method of Multipliers*, ser. Foundations and Trends in Machine Learning. NOW, 2010, vol. 3, no. 1.
- [29] M. Pai, *Energy Function Analysis for Power System Stability*, 1st ed. Springer, 1989.

- [30] B. Van Parys, P. Goulart, and M. Morari, “Infinite-horizon performance bounds for uncertain constrained systems,” in *Conference on Decision and Control*, Maui, Hawaii, 2012.

Table 1: Parameters of elastic participants

Thermal generators, $i = 1, \dots, 7$: $\tilde{c} = 0$					
States: $\begin{bmatrix} \text{Current output} \\ \text{Previous output} \end{bmatrix}$, $\tilde{A}_i = \begin{bmatrix} 0 & 0 \\ 1 & 0 \end{bmatrix}$, $\tilde{B}_i = \begin{bmatrix} 1 \\ 0 \end{bmatrix}$, $\tilde{C}_i = [1 \ 0]$					
$\tilde{f}_i^x = \begin{bmatrix} 0 \\ 0 \end{bmatrix}$, $\tilde{H}_i^x = \begin{bmatrix} \alpha & -\alpha \\ -\alpha & \alpha \end{bmatrix}$, $f_i^u = f$, $H_i^u = H$, $x_0^i = \begin{bmatrix} p_0 \\ p_0 \end{bmatrix}$					
Constraints, $\forall k$: $0 \leq [x_k^i]_1 \leq p_{\max}$, $0 \leq [x_k^i]_2 \leq p_{\max}$,					
$0 \leq u_k^i \leq p_{\max}$					
i	f	H	α	$p_{\max}$	p_0
1	20	0.020	1.0	1800	400
2	20	0.080	0.1	450	100
3	20	0.037	0.1	972	216
4	20	0.024	1.0	1494	332
5	20	0.031	0.1	1170	260
6	20	0.036	0.1	1008	224
7	20	0.200	0.1	180	40

Storage units, $i = 8, 9$:				
States: $\begin{bmatrix} \text{Current output} \\ \text{Previous output} \\ \text{Storage level} \end{bmatrix}$, $\tilde{A}_i = \begin{bmatrix} 0 & 0 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix}$, $\tilde{B}_i = \begin{bmatrix} 1 \\ 0 \\ -1 \end{bmatrix}$,				
$\tilde{C}_i = [1 \ 0 \ 0]$, $\tilde{f}_i^x = \begin{bmatrix} 0 \\ 0 \\ -2\gamma s_0 \end{bmatrix}$, $\tilde{H}_i^x = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & \gamma \end{bmatrix}$, $f_i^u = 0$,				
$H_i^u = 0$, $x_0^i = \begin{bmatrix} 0 \\ 0 \\ s_0 \end{bmatrix}$, $\tilde{c} = \gamma(\frac{s_{\max}}{2})^2$				
Constraints, $\forall k$: $0 \leq [x_k^i]_1 \leq p_{\max}$, $0 \leq [x_k^i]_2 \leq p_{\max}$,				
$0 \leq [x_k^i]_3 \leq s_{\max}$, $0 \leq u_k^i \leq p_{\max}$				
i	$s_{\max}$	γ	$p_{\max}$	s_0
8	1000	0.01	200	500
9	1000	0.01	200	500

Wind farms [<i>Node</i> : $\tilde{G}_i$]	<i>32</i> : [2 0], <i>33</i> : [1 1], <i>34</i> : [0 2]
Loads [<i>Node</i> : p_{nom}]	<i>3</i> : 322, <i>4</i> : 500, <i>7</i> : 233.8, <i>8</i> : 522, <i>12</i> : 7.5, <i>15</i> : 320, <i>16</i> : 329, <i>18</i> : 158, <i>20</i> : 628, <i>21</i> : 274, <i>23</i> : 247.5, <i>24</i> : 308.6, <i>25</i> : 224, <i>26</i> : 139, <i>27</i> : 281, <i>28</i> : 206, <i>29</i> : 283.5, <i>31</i> : 9.2, <i>39</i> : 1104

Table 2: Uncertainty model parameters

Σ	$q_{\min}$	$q_{\max}$	A_{β}	b_{β}
$\begin{bmatrix} 2000 & 2400 \\ 2400 & 4000 \end{bmatrix}$	$\begin{bmatrix} 0 \\ 0 \end{bmatrix}$	$\begin{bmatrix} 500 \\ 500 \end{bmatrix}$	$\begin{bmatrix} I \\ -I \end{bmatrix}$	$80 \cdot \mathbf{1}$

Table 3: Cost comparison for different structural restrictions on D_i

Scheme	Average cost increase over prescient case	Cost of reserves
1. Prescient	—	0 %
2. Diagonal	0.791 %	$:= 100.0$ %
3. Full policy	0.519 %	65.5 %